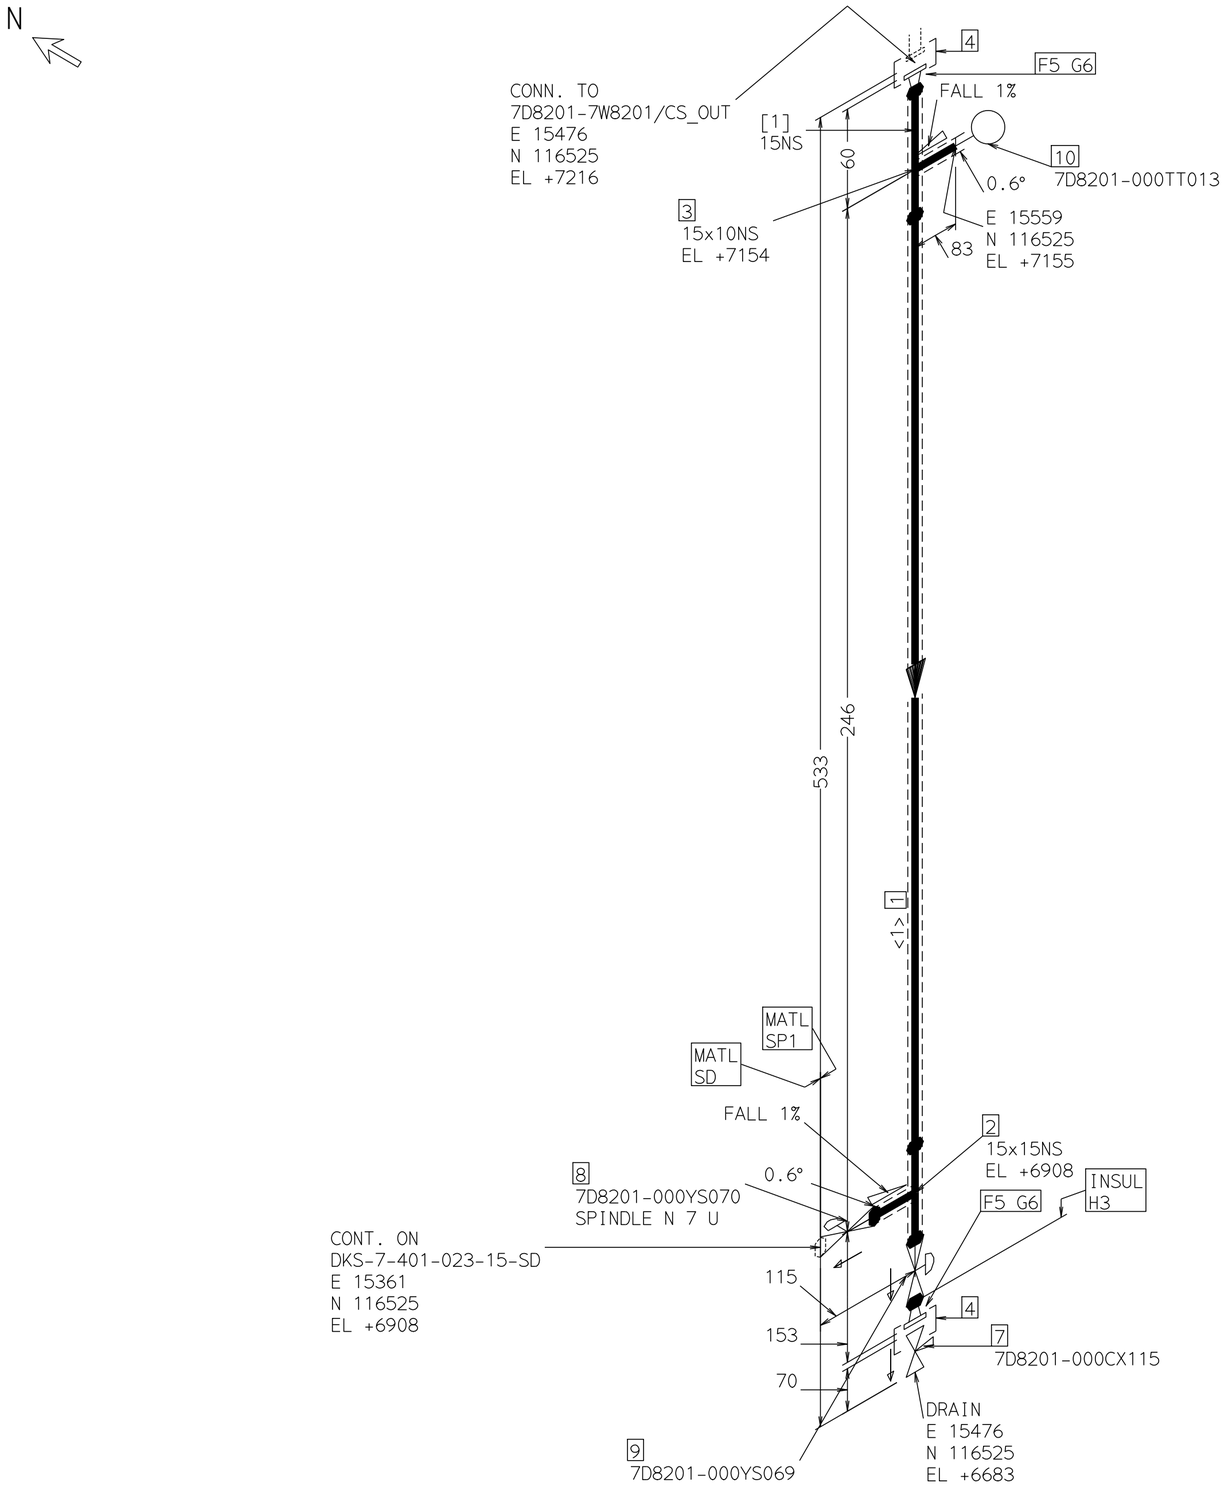

Construction and connection dimensions must be checked on site!
All axis and positions must be checked on site!

FABRICATION MATERIALS

PT NO	COMPONENT DESCRIPTION	N.S. (MM)	ITEM CODE	QTY
	PIPE			
1	Pipe - seamless or welded - DIN 11866 series B acc.to Pipespec	15	SP1/PPAB6541-PB00_015	0.2M
	FITTINGS			
2	Tee Type TK (short) - DIN 11865 series B acc.to Pipespec	15 x 15	SP1/ETOB6541-PBK0_015-015	1
3	Thermowell Tee iTherm411 DN15xG3/8" acc.to Pipespec	15 x 10	SP1/THERMO-TM411_015	1
4	Clamp with anti-tipping device for TC acc.to Pipespec	15	SP1/BKF26001-S000_015	2
	FLANGES			
5	Clamp connection - flat sealing surface - DIN 32676 series B, TC50.5mm acc.to Pipespec	15	SP1/FKF16541-0B41_015	2
	GASKETS			
6	TC seal-DIN 32676 - GYLON 3504 - Gylon 3504	15	SP1/GP089611-0B00_015	2
	VALVES / IN-LINE ITEMS			
7	Needle Valve HSV20 Clamp connection	15	SP1/HSV20-VALVE_015	1
	INSTRUMENTS			
8	Diaphragm valve with welding ends MG10.PNEU 650.GEMUE acc.to Pipespec 7D8201-000YS070	15		1
9	Diaphragm valve with welding ends MG10.PNEU 650.GEMUE acc.to Pipespec 7D8201-000YS069	15		1
10	TT TM411 , 85mm, G3/8" female 7D8201-000TT013	10		1
	PIPE SPOOLS			
	[1]			

CUT PIPE LENGTH

ITEM CODE	PIECE NO	CUT LENGTH	N.S. (MM)	REMARKS	END PREP.
SP1/PPAB6541-PB00_015	<1>	186	15		BE/BE

Rev.	Date	Description	Issued	Checked	Released
02	18 Jan 2024	AFC	THPR	DATL	JYEN
01	30 Nov 2023	For review	JYEN	DATL	JUCH

peleven®

ThermoFisher SCIENTIFIC

Issued for construction: Date: 18 Jan 2024 Signature:

Pipe class	Insulation	Floor
SP1	H3	1
P&ID-No.	CH06822004-BD-PI-1179	

Project: 5K SUT | Project-No. Peleven | CH06823001

Isometric Number / Pipe name: CSL-7-201-018-15-SP1

Page 1 / 1